

ONE

TRADITIONAL ESPRESSO

Models

- 1B PID dual
- 2B PID R-dual GSP
- 2B PID dual
- 2B PID R-dual LFPP



ONE 1B Dual



ONE 2B Dual



ONE 2B R-GSP Dual



ONE 2B R-LFPP Dual

Description

From the coffee lover or the barista amateur to the experienced coffee master, the ONE brings a superior espresso experience by introducing high performance features and smart solutions, wherever you are at your home, in the office or in your own small coffee shop.


Main USP's & Advanced features

- Renovated design concept
- Ease of use
- High performance hydraulics
 - PID Controlled
 - Gradual soft Pre Infusion (GSP): Flexible but accurate pre-infusion times to improve the extraction rates. From 0-20 seconds, the pre-infusion parameters are easily adjustable from the OLED display. It gradually increases the pressure up to the desired brewing pressure.
 - Low Flow Pressure Profiling (LFPP): Espresso creation is now easier than even before. Our rotary pump also allows to set different pressure profiles when extracting the coffee, in real time! Be as creative as you wish by using our intuitive but extraordinary precise Push & Rotate knob (from 0.2 to 0.5 b). Or use one of your own pre-set recipes*.

CREMTech
inside

* The machine can save up to 5 different recipes that can be filed both saving the last extraction through the Barista Mode of the OLED Display or by uploading them via USB.

Technical specifications

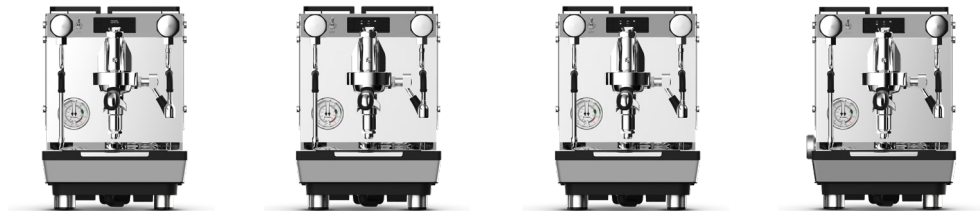

	ONE - 1B Dual	ONE - 2B Dual	ONE - 2B R-GSP Dual	ONE - 2B R-LFPP Dual
Height, width, depth	420, 300, 458 mm 17, 12, 18"	420, 300, 458 mm 17, 12, 18"	420, 300, 458 mm 17, 12, 18"	420, 311, 458 mm 17, 12.2, 18"
Weight	30 kg 66 lb	30 kg 66 lb	30 kg 66 lb	30 kg 66 lb
Power ratings	220-240V, 2150W, (<9.35A)	220-240V, 2150W, (<9.35A) (2x2000W)	220-240V, 2250W, (<9.78A) (2x2000W)	220-240V, 2250W, (<9.78A) (2x2000W)
Boiler(s) capacity	1.7	1.7+1.2	1.7+1.2	1.7+1.2
Operation pressure	0.8 to 1.2 bar	0.8 to 1.2 bar	0.8 to 1.2 bar	0.8 to 1.2 bar
Water connection	3/8" Internal thread	3/8" Internal thread	3/8" Internal thread	3/8" Internal thread
Water tank capacity	1.8 l	1.8 l	1.8 l	1.8 l
Noise level	<70dB	<70dB	<70dB	<70dB
Steam wands+HW tap	1+1	1+1	1+1	1+1

Standard Features

- PID Controlled
- E-61 group head
- Cool touch wands
- Double Manometer
- ½ turn knobs
- Smart drip tray
- Auto Water tank & mains connection
- Customizable panels
- New packaging solution

Advanced Features

- Rotary pump (only 2B versions)
- GSP (only 2B versions)
- LFPP (only 2B R-dual LFPP Dual version)

Barista kit - 1B Version


- 1 filter basket (7gr)
- 1 filter basket (14gr)
- Cleaning Brush
- Water tank filter
- Cleaning tablets blister
- Blind metal filter
- 1 double narrow spout portafilter

Barista kit Pro - 2B Versions

- 1 filter basket (7gr)
- 1 filter basket (14gr)
- 1 filter basket (21gr)
- Cleaning Brush
- Cleaning tablets blister
- Water tank filter
- Blind metal filter
- Flat metallic tamper
- Extra Nozzle steam tap 3H
- Milk jar 300ml small
- 1 double narrow spout portafilter

Options

- **Wooden kit:**
Portafilter handle
Group lever handle
Steam and hot water tap
Side Panels

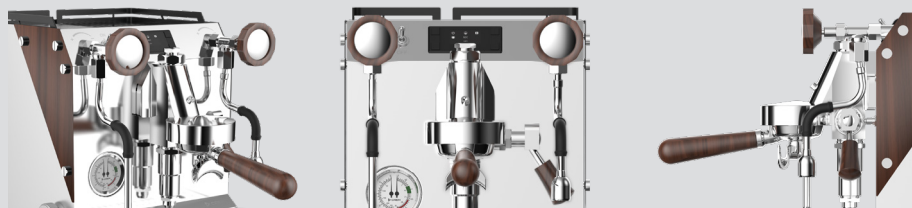

NOTE: Please check your regional price list for available versions/options and part numbers.

INSTALLATION NOTE: Please refer to the User Manual and the Technical Manual.

Welbilt reserves the right to make changes to the design or specifications without prior notice.